


**Exam** : [Nortel 920-808](#)

**Title** : **Real-Time Networking  
Technologies**

**Version** : **Demo**

1. Click on the Exhibit button.

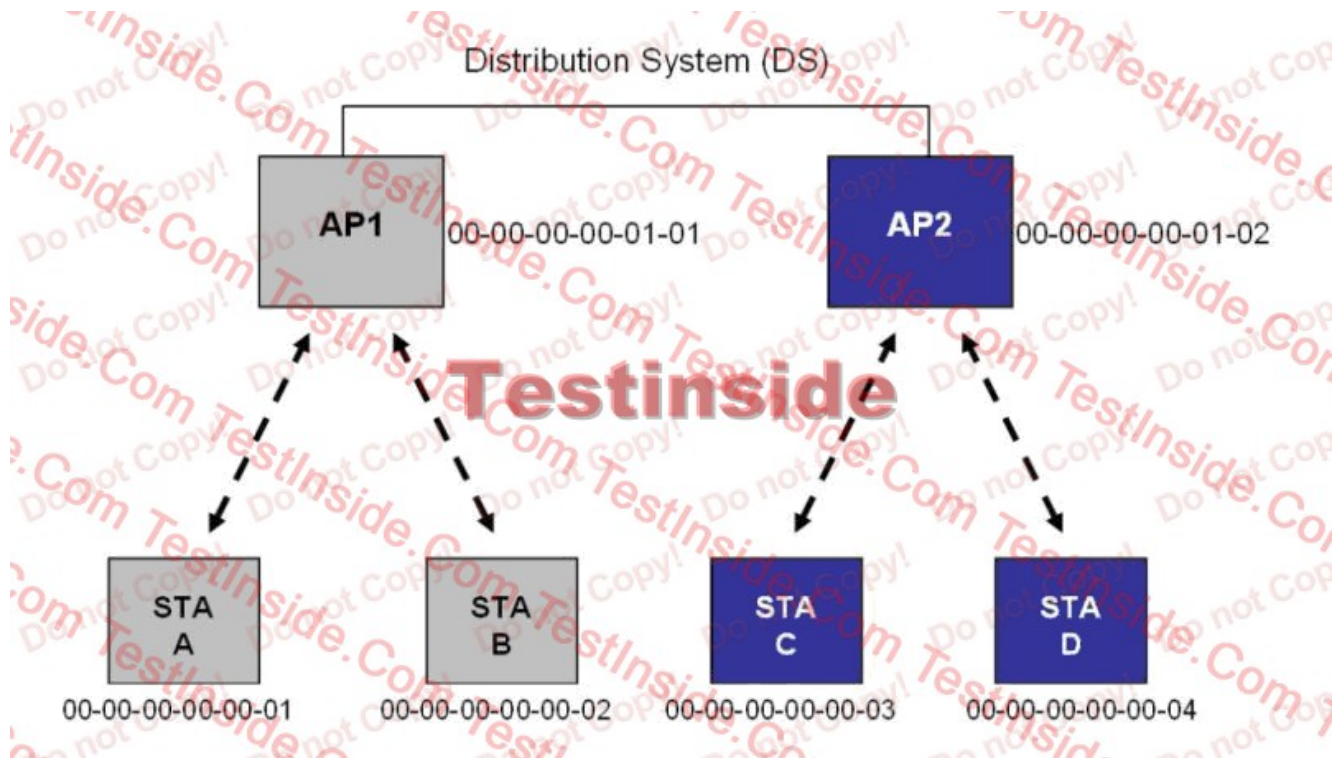

With reference to the exhibit, which statement correctly describes the use of the four-address frame format when A transmits a frame to B?

- A. The source station A needs to fill the four address fields of the data frame.
- B. The source station A must specify its address and destination address within the same BSS and the BSSID to which the source and stations are associated.
- C. The source station A needs only to fill its address in one of the address fields. AP1 will fill the rest of the address fields.
- D. The source station A needs only to specify the destination address within the same BSS.

**Answer: B**

2. Which protocols are used to detect the failures that impact Label Switch Path (LSP) traffic?

- A. RSVP-TE Hello and ITU-T Y1711
- B. OSPF-TE keep-alive and ATM PNNI
- C. RSVP-TE Hello and OSPF keep-alive
- D. ITU-T Y1711 and OSPF-TE keep-alive

**Answer: A**

3. Assessing a LAN for its ability to carry VoIP is also known as "network health check".

What is a network health check intended to predict?

- A. whether the network can provide efficient signaling and call establishment
- B. whether the network has sufficient security in the communication link
- C. the reliability of VoIP services running the network
- D. identification of VoIP quality-killing impairments

**Answer: D**

4. Which method is used for call transfers and redirection to a conference bridge when the Session Initiation Protocol (SIP) is used?

- A. PRACK
- B. UPDATE
- C. REFER
- D. NOTIFY

**Answer: C**

5. Which statement is true concerning the SIP protocol?

- A. SIP is based on H.323.
- B. SIP is an extension of HTTP/1.1.
- C. SIP is a component of HTTP/1.1.
- D. SIP is based on a request/response transaction model.

**Answer: D**